

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

12

EUROPEAN PATENT APPLICATION

21 Application number: 82111569.8

51 Int. Cl.³: **G 11 B 5/84**
B 24 B 7/00

22 Date of filing: 14.12.82

30 Priority: 11.01.82 US 338689

43 Date of publication of application:
20.07.83 Bulletin 83/29

84 Designated Contracting States:
DE FR GB

71 Applicant: International Business Machines
Corporation
Old Orchard Road
Armonk, N.Y. 10504(US)

72 Inventor: Bornhorst, Randy Joseph
3549 3rd Place N.W.
Rochester, MN 55901(US)

72 Inventor: Bowen, Arlen John
3114 Knoll Lane
Rochester, MN 55901(US)

74 Representative: Vekemans, André
COMPAGNIE IBM FRANCE Département de Propriété
Industrielle
F-06610 La Gaude(FR)

64 Apparatus and method for burnishing magnetic disks.

67 The burnishing tool has a plurality of holes (41) in the planar surface (40) which engages the flexible magnetic disk (4). Each hole contains a burnishing blade (42) positioned at 45° to the direction of motion. A manifold (20) connects each hole to a vacuum pump which draws air into the holes causing the flexible magnetic disk to fly against the planar surface. The vacuum also removes the debris from the burnishing tool.




FIG. 3

APPARATUS AND METHOD FOR BURNISHING MAGNETIC DISKS

Various burnishing techniques have been used to finish the surface of flexible magnetic disks. In most cases these techniques have been adequate although available diskettes have a wide range of surface finishes. There is, however, a requirement for ever increasing bit density which cannot be satisfied with existing coatings. It has been found that simply improving existing coatings with more burnishing to provide a smoother finish is not adequate and an improved coating is necessary. Unfortunately, the existing burnishing techniques are not adequate to handle the improved coatings which have much improved smoothness. Smearing of asperities, embedding debris and removal of particles, causing voids, are common faults of existing techniques when applied to improved, smoother, coatings. The improved surface needs only to have the occasional large asperity removed to eliminate readback defects. A further problem exists in the time required to burnish a disk. While some techniques provide adequate surface finish on existing media from a 20 to 40 second burnish, a more desirable figure is 2-4 seconds. In other words, to be a satisfactory technique, the burnishing of improved media should be able to be completed in 2-4 seconds. In addition to all this, the new technique should not require exotic technology or equipment but should resemble the existing burnishing process as much as possible to make it easy to implement in existing manufacturing sites with minimum retraining of machine operators.

The surface quality of a flexible magnetic disk as measured by the error free reproduction of recorded data can be substantially improved by mechanically treating the disk surface. The desirability of surface treatment and its advantages were recognized when it was discovered that untreated disk surfaces had reduced errors after they had been used for a period of time. There was rapid improvement for an initial period of use. After this, the disk remained essentially unchanged until the effect of mechanical wear became evident.

Following this discovery, efforts were made to speed up the break-in period since it was not practical to run the disks in normal fashion for the time required to improve their performance.

The various disk manufacturers use a variety of techniques, not all of which are publicly known. Examples of surface treatment are shown in U. S. patent 3,943,666 and 4,179,852 and IBM Technical Disclosure Bulletin Vol. 14, No. 5, October 1971 pages 1144-1146; Vol. 19, No. 10, March 1977 pages 3829-3830 and Vol. 20, No. 3, August 1977 pages 1146-1147.

These techniques are variously referred to as burnishing, polishing or honing but the objective, removal of asperities to improve the smoothness of the disk, is the same regardless of the name applied to the technique.

U. S. patent 3,943,666 describes a process which uses an abrasive cylinder to burnish a flexible disk supported against a resilient backing plate. The surface deviation finish claimed for this process is 1.8 AA in a 12-22 second treatment. While surface finish dimensions are a factor, the real test is how the disk performs in actual practice. Even a very smooth finish may not perform well if the finish is obtained by a process which creates voids in the recording media.

U. S. patent 4,179,852 uses an abrasive loaded pad to polish a flexible disk. While the patent does not describe the quality of the surface finish obtained, it does specify a burnishing period of approximately 20 seconds.

U. S. patent 3,486,274 describes an apparatus for grinding the surface of a rigid disk. The metallic grinding pads are fastened to a rotating head in a fashion which permits them to conform to the undulations in the rigid disk. The grinding pads have slots of varying widths according to their distance

from the center of the rotating head. Nothing is said concerning the ability to finish flexible disks.

IBM Technical Disclosure Bulletin Vol. 14, No. 5, pages 1444-5 shows a flexible disk surface treatment which uses a sharp flat hard blade which bears against a flexible disk in a region backed by a resilient pad. The treatment is specified to take 20 seconds.

IBM Technical Disclosure Bulletin, Vol. 19, No. 10, pages 3829-30 illustrates a burnishing process which typifies the prior art. A cup type burnishing tool is positioned within a hole in a flat Bernoulli plate which supports a rotating flexible disk. The edge of the cup forms a circular knife which engages the disk and smoothes out any high spots or bumps. The flow of air outwardly across the knife edge burnishing cup appears to create an area of reduced pressure within the cup to draw the flexible disk into engagement with the cup.

IBM Technical Disclosure Bulletin, Vol. 20, No. 3, August 1977, pages 1146-7 sets forth an improved version of the process described in Vol. 19. The improvement consists of a vacuum applied to the interior of the burnishing tool and a change to a rounded edge on the tool instead of the sharp edge previously described. This improvement is directed specifically to media which uses chromium dioxide coatings.

From the wide range of processes described above it can be seen that the treatment is more of an art than a science. Where one process uses a sharp edged tool another uses a round edge. Some processes use abrasives either bonded to a tool or in a slurry and others use only a tool. Suffice to say that what works for one media is often not satisfactory for another or at least does not produce an optimum result.

The principal object of the invention is to provide an improved method and apparatus for burnishing flexible magnetic

disks having an improved surface coating which cannot be satisfactorily burnished with existing equipment and techniques. Flexible disks having a chromium dioxide coating are particularly suited to this technique. The apparatus includes a burnishing tool having multiple blades positioned in individual openings or holes. The holes are connected to a plenum. The tool is rotated over the flexible disk which is also rotated. A vacuum is applied to the plenum causing the flexible disk to fly at a fixed distance from the surface of the burnishing tool. The vacuum also serves to remove the material that is dislodged from the surface of the disk by the burnishing process. The burnishing blades are spaced from the wall of the hole to prevent material removed from the disk from becoming lodged in the corner where it could cause scratches and interfere with the burnishing process. The orientation of the burnishing blades is selected to ensure that each area of the flexible disk is treated by blades which are at different angles with respect to the surface.

Fig. 1 is a schematic drawing of the basic apparatus used to practice the invention.

Fig. 2 is a partial side view of the burnishing tool and the platter used to rotate the flexible disk.

Fig. 3 is an enlarged portion of the burnishing tool and platter of Fig. 2 showing the tool in the operative position.

Fig. 4 is a partial sectional view taken through a burnishing blade and a flexible disk.

Fig. 5 is a partial perspective view showing a burnishing blade and the notches at the ends of the blade.

Fig. 6 is a bottom view of the burnishing tool.

Fig. 7 shows the orientation of the burnishing blades.

Fig. 8 is a perspective view of the burnishing tool and manifold.

The flexible disk surface finishing system shown in Fig. 1 has a flexible disk support platter 1 suitably mounted for rotation about a first axis 2. A hub 3, located at the center of platter 1, positions and clamps flexible disk 4 on platter 1 so that disk 4 rotates at the same speed as platter 1. Hub 3 can be an expandable collet, or a flange type clamp operated by air, electrical or mechanical means. Precise centering is not required but no slippage between the disk 4 and platter 1 should occur during the finishing process.

Platter 1 can be driven by any suitable means such as drive pulley 10, mounted on drive shaft 11, and belt 12. Shaft 11 is driven by means which provides precise control of the rotational speed. In the preferred embodiment the platter 1 is rotated in the direction of arrow 13 at 1658 revolutions per minute and controlled within ± 2 revolutions per minute. A synchronous motor or stepping motor energized by a source of energy at the appropriate frequency is a preferred drive means for shaft 11.

A burnishing tool 19 including a manifold 20 is positioned above the platter 1. Manifold 20 is mounted on hollow shaft 21 which rotates within the sealed bearing assembly 22. Burnishing tool 19 and manifold 20 are rotated about axis 23 by means of belt 24 and drive pulley 25 on shaft 26. The burnishing tool is rotated in the direction of arrow 27 at a speed of 1650 revolutions per minute and controlled within ± 2 revolutions per minute.

The manifold 20 is mounted so that it may be lowered to within 0,254 mm of flexible disk 4. When in this position, valve 30 is rotated from a position which vents the manifold to the atmosphere to the position shown in Fig. 1. This

applies a vacuum, generated by vacuum pump 31, to the manifold 20. The vacuum system includes a relief valve 32 and reservoir 33.

The relationship between burnishing tool 19 and disk 4 prior to the finishing is shown in Fig. 2. Burnishing tool 19 is spaced well away from platter 1 to allow disk 4 to be placed in position and clamped to platter 1 by hub 3. In order to remove such loose particles as may exist on the disk surface, a brush 39, rotating in the direction of arrow 38, may be lowered into engagement with flexible disk 4.

After this treatment with brush 39 the burnishing tool 19 is moved to the position shown in Fig. 3 which places the lower, planar, surface 40 of manifold 20 approximately 0,254 mm above disk 4. When valve 30 is moved to the position shown in Fig. 1, the resulting air flow between disk 4 and planar surface 40 into the openings 41 causes flexible disk 4 to fly against planar surface 40 as shown in Fig. 4. In the area of the planar surface 40 the disk 4 will fly at a height greater than the average coating roughness, but less than the height of the troublesome asperities. However, in the area of holes 41, the flexible disk 4 bows slightly upward and comes into engagement with burnishing blade 42. The engagement is primarily a function of the mechanical properties of the flexible disk 4, the air flow between disk 4 and planar surface 40, the amount of vacuum, and the size of hole 41. Other factors are less significant. In the preferred embodiment the gauge vacuum within manifold 20 during operation is 3×10^4 Pa ($\pm 0,3$).

The burnishing blade 42 engages flexible disk 4 at right angles so that the blade tends to wear sharp. This is significant to blade life and the performance of the system. A sharp blade tends to reduce smearing of asperities. Smearing is undesirable because, among other disadvantages, it reduces the sites available for lubricant retention. Smearing also tends to aggravate the transfer of asperities from the media

to the recording transducer where they adhere and cause an increase in the head to disk spacing. Thus, a smoother finish, if produced by smearing, may not result in improved performance.

The physical arrangement of burnishing blades 42 and holes 41 is shown in greater detail in Figs. 5-8. The shape of blade 42 is shown in Fig. 5. The ends 43 and 44 are spaced away from the wall of hole 41. The distance between the ends 43 and 44 and the wall is selected to prevent debris removed from the disk 4 from becoming wedged between the blade 42 and the wall. This distance depends largely on the size of the debris generated during the burnishing process and will be determined experimentally in most cases. A selected dimension can be used in a trial run. If the corners become filled, a larger dimension can be tried. Although the drawing is not made to scale it does illustrate an approximation for the gap. A distance one to three times the blade thickness is a good starting point. Further, if too large a gap is used the ends 43 and 44 may score the surface of disk 4 although this is not a problem with acceptable gaps.

Fig. 6 shows the arrangement of the holes 41 in the planar surface 40. In the preferred embodiment eight holes 41 and blades 42 are used. The area of holes 41 is approximately 33% of the area of planar surface 40. These are spaced at regular intervals along a circular path equidistant from the axis of rotation. It is desirable to have the diameter of the circular area encompassed by the blades to be slightly greater than the radial region to be burnished on the disk. This allows a disk to be burnished without the need for radial translation of burnishing tool 19.

Each of the blades 42-1 through 42-8 is positioned at 45° with respect to the direction of rotation. It has been found that improved burnishing results if the blades are so arranged. Although the reason for this is not entirely clear it may be due to reduced smearing of asperities. An addi-

tional improvement is provided by positioning alternate blades at 90° , still at 45° with respect to the direction of rotation, but canted in the other direction. This arrangement is shown in Fig. 7 where the leading edges of blades 1, 3, 5 and 7 lie 45° to the left of the direction of rotation shown by arrow 50. The leading edges of blades 2, 4, 6 and 8 lie 45° to the right of arrow 50. Thus, when a surface imperfection is encountered, blade 1 tends to shear it to the right, blade 2 tends to shear it to the left, etc. This arrangement has been effective in reducing the smearing of such imperfections when the tool or tools move in the same path at the same angle with respect to the disk.

The front perspective view of Fig. 8 shows the planar surface 40 of burnishing tool 19 and the blades 42 arranged in the holes 41. Each of the holes 41-1 through 41-8 communicates with the hollow interior of manifold 20. This arrangement is shown in Fig. 3. The blades 42 may be individually fabricated, mounted in holes 41 and then ground flush with planar surface 40. It has been found preferable to fashion the blades and the manifold from a single piece of tool steel. The holes 41 and blades 42 can be fabricated by means of conventional electro discharge machining or chemical etching. The planar surface 40 is finished in the usual fashion by grinding, lapping, and polishing to a mirror-like finish.

CLAIMS

1. Apparatus for finishing the surface of a flexible magnetic disk (4) characterized in that it comprises :

first drive means (10) for rotating said flexible disk about a first axis (2) perpendicular to the plane of said disk,

a manifold (20) rotatable about a second axis (23) parallel to and spaced from said first axis,

said manifold having a planar surface (40) perpendicular to said second axis,

a plurality of openings (41) in said planar surface

a burnishing blade (42) mounted in at least one of said openings with a blade edge positioned substantially coplanar with said manifold planar surface, the ends of said blade edge being spaced from the wall of said openings,

means (30, 31, 32) for applying a vacuum to said manifold to draw a flexible disk toward said manifold planar surface, and

second drive means (25) for rotating said manifold about said second axis.

2. Apparatus according to Claim 1 characterized in that it further includes :

means for controlling the speed of said first and second drive means (10, 25) to cause the rotational speed of said manifold (20) to differ from the rotational speed of said disk (4).

3. Apparatus according to Claim 2 characterized in that :

the rotational speed of said manifold (20) is $1650 \text{ RPM} \pm 2 \text{ RPM}$ and the rotational speed of said disk (4) is $1658 \text{ RPM} \pm 2 \text{ RPM}$.

4. Apparatus according to any one of Claims 1-3 characterized in that :

the diameter of said planar surface (40) is greater than the radial length of the area to be burnished.

5. Apparatus according any one of Claims 1-4 characterized in that :

the distance between said first and second axes (2, 23) remains constant during burnishing.

6. Apparatus according to any one of Claims 1-5 characterized in that :

said openings (41) are arranged equidistant from said second axes (23).

7. Apparatus according to any one of Claims 1-6 characterized in that :

the area of said openings (41) is approximately 33% of the area of said planar surface (40).

8. Apparatus according to any one of Claims 1-7 characterized in that :

the gauge vacuum within said manifold (20) during operation is $3 \times 10^4 \text{ Pa} (\pm 0,3)$.

9. A process for treating the surface of a flexible magnetic disk characterized in that it comprises the steps of:

1. Rotating the disk at a first speed,
 2. Rotating a manifold, having burnishing blades positioned in holes in a planar surface, at a second, different speed,
 3. Applying a vacuum to said manifold to cause said disk to fly against said planar surface and engage said burnishing blades,
 4. Discharging said vacuum to disengage said disk from said manifold surface when the treatment is complete.
10. A process according to Claim (characterized in that :
- step 3 lasts at least 2 seconds and not more than 5 seconds.
11. A flexible magnetic disk characterized in that it treated according to the process of claim 9 or 10.

FIG. 1

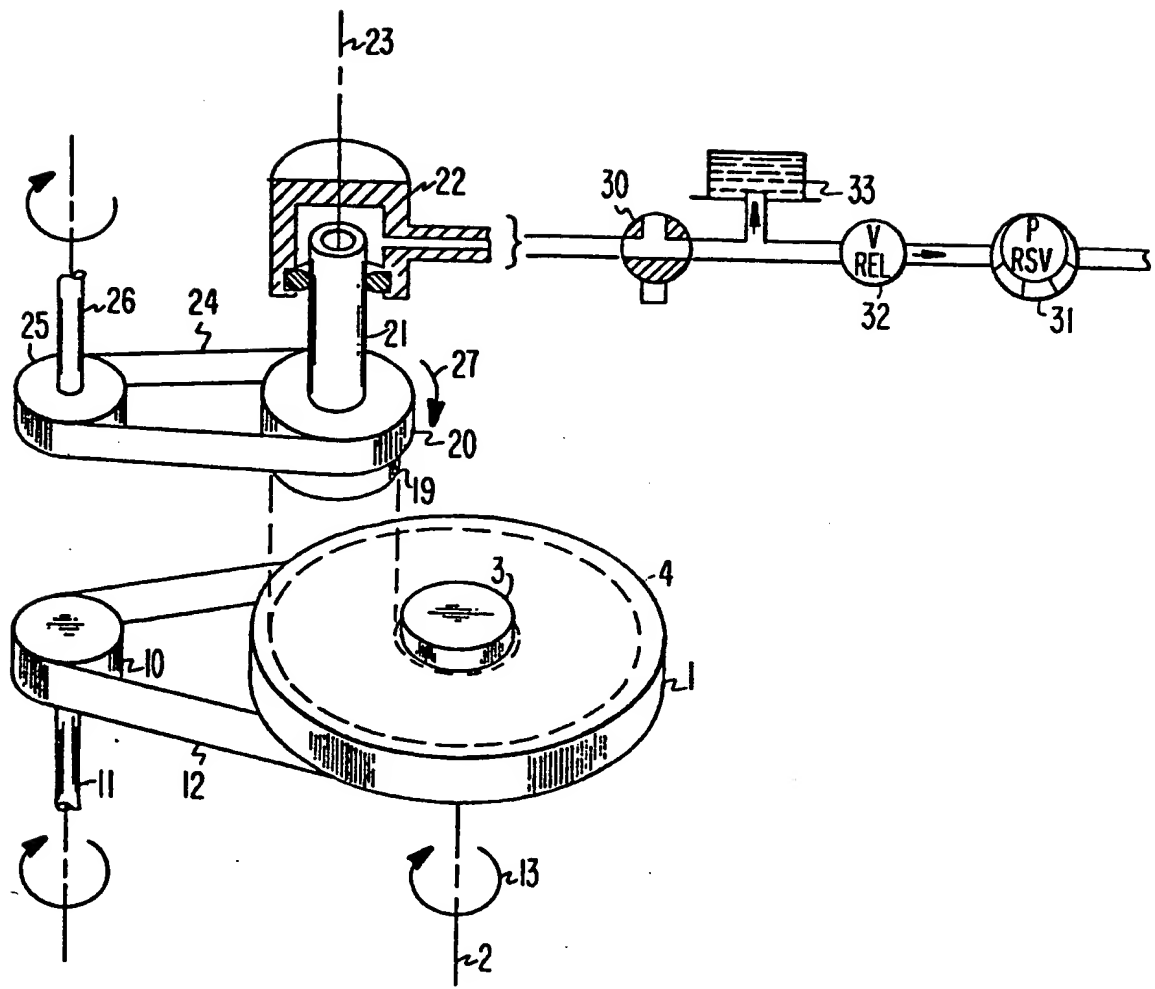


FIG. 2

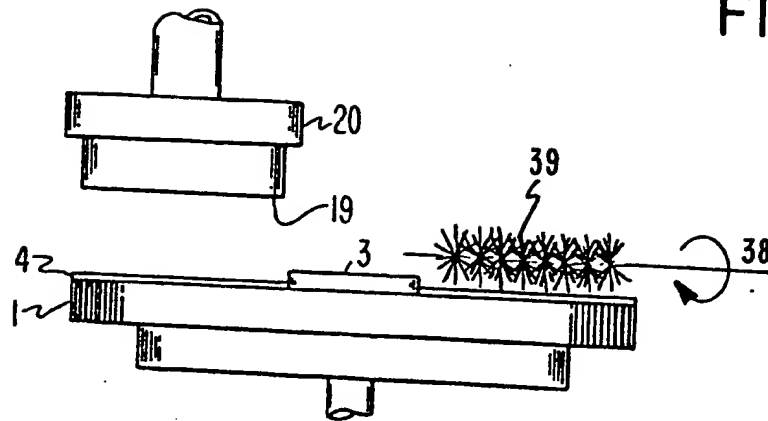


FIG. 3

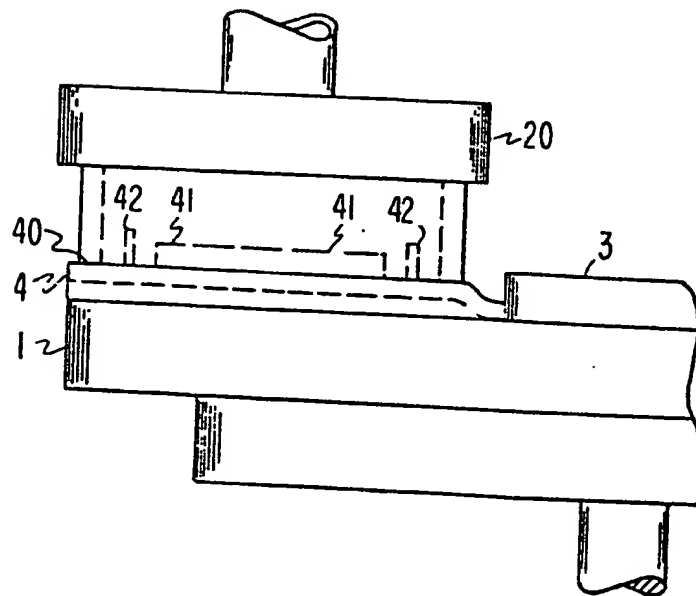


FIG. 4

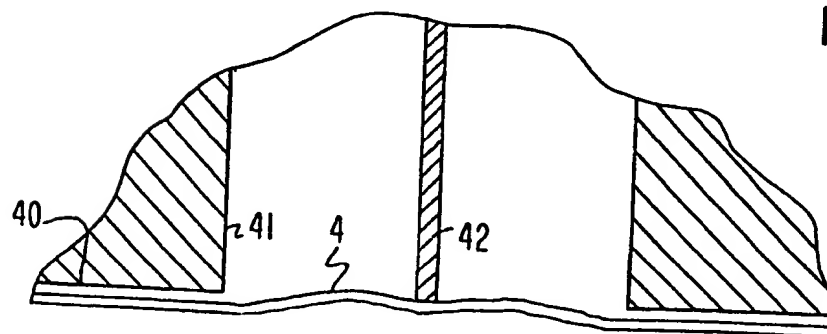


FIG. 5

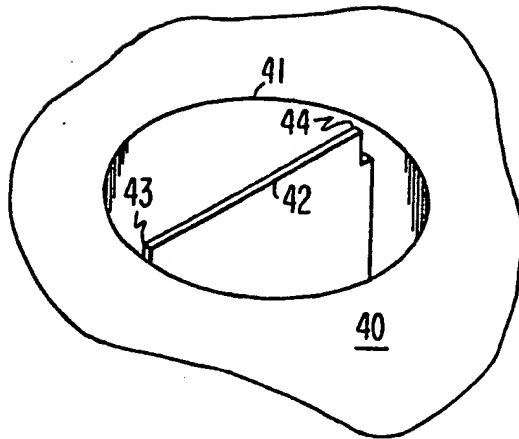


FIG. 6

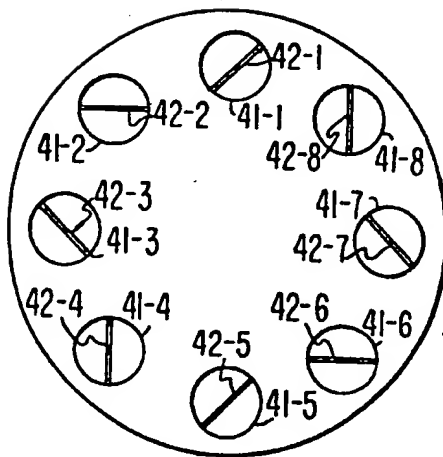


FIG. 7





FIG. 8



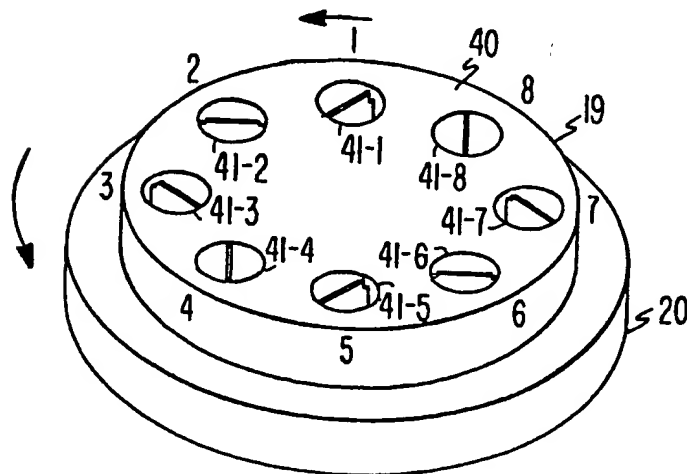

Eur päisches Patentamt
European Patent Office
Office européen des brevets

⑪ Publication number:

**0 083 753
A3**

⑫

EUROPEAN PATENT APPLICATION

⑲ Application number: 82111569.8

⑤① Int. Cl.⁴: **G 11 B 5/84, B 24 B 7/00**

⑳ Date of filing: 14.12.82

③① Priority: 11.01.82 US 338689

⑦① Applicant: International Business Machines Corporation,
Old Orchard Road, Armonk, N.Y. 10504 (US)

④③ Date of publication of application: 20.07.83
Bulletin 83/29

⑦② Inventor: Bornhorst, Randy Joseph, 3549 3rd Place N.W.,
Rochester, MN 55901 (US)
Inventor: Bowen, Arien John, 3114 Knoll Lane,
Rochester, MN 55901 (US)


⑥④ Designated Contracting States: DE FR GB

⑥⑥ Date of deferred publication of search
report: 11.12.85 Bulletin 85/50

⑦④ Representative: Vekemans, André, COMPAGNIE IBM
FRANCE Département de Propriété Industrielle,
F-06610 La Gaude (FR)

⑤④ Apparatus and method for burnishing magnetic disks.

⑤⑦ The burnishing tool has a plurality of holes (41) in the planar surface (40) which engages the flexible magnetic disk (4). Each hole contains a burnishing blade (42) positioned at 45° to the direction of motion. A manifold (20) connects each hole to a vacuum pump which draws air into the holes causing the flexible magnetic disk to fly against the planar surface. The vacuum also removes the debris from the burnishing tool.

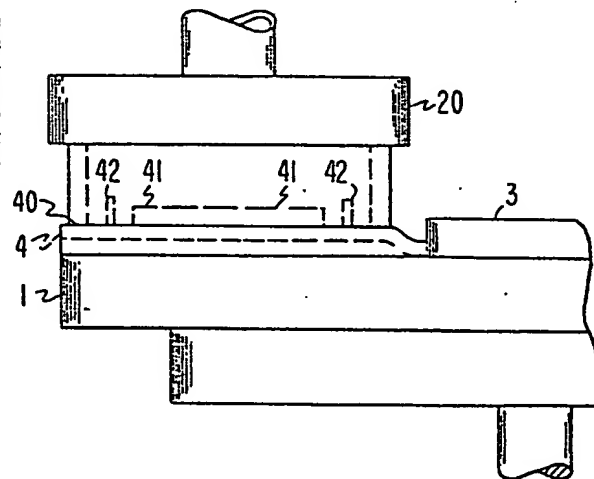

EP 0 083 753 A3

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 July 2000 (20.07.2000)

PCT

(10) International Publication Number
WO 00/42072 A3

(51) International Patent Classification⁷: **C07K 16/00**,
A61K 39/395, C12N 15/13, 15/85, 5/10, G01N 33/68,
33/577, C07K 16/22 // 16/28

(21) International Application Number: PCT/US00/00973

(22) International Filing Date: 14 January 2000 (14.01.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/116,023 15 January 1999 (15.01.1999) US

(71) Applicant: GENENTECH, INC. [US/US]; 1 DNA Way,
South San Francisco, CA 94080-4990 (US).

(72) Inventor: PRESTA, Leonard, G.; 1900 Gough Street,
#206, San Francisco, CA 94109 (US).

(74) Agents: LEE, Wendy, M. et al.; Genentech, Inc., 1 DNA
Way, South San Francisco, CA 94080-4990 (US).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,
DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,
LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,
RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA,
UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— With international search report.

(88) Date of publication of the international search report:
30 November 2000

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 00/42072 A3

(54) Title: POLYPEPTIDE VARIANTS WITH ALTERED EFFECTOR FUNCTION

(57) Abstract: The present invention concerns polypeptides comprising a variant Fc region. More particularly, the present invention concerns Fc region-containing polypeptides that have altered effector function as a consequence of one or more amino acid modifications in the Fc region thereof.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/00973

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C07K16/00 A61K39/395 C12N15/13 C12N15/85 C12N5/10
G01N33/68 G01N33/577 C07K16/22 //C07K16/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C07K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

BIOSIS, EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 624 821 A (WINTER GREGORY P ET AL) 29 April 1997 (1997-04-29) column 1, line 44 -column 2, line 61 column 5, line 53-65 column 6, line 38-42 claims --- -/--	1-49

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 July 2000

Date of mailing of the international search report

25/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Covone, M

INTERNATIONAL SEARCH REPORT

Int: tional Application No

PCT/US 00/00973

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>SARMAY G ET AL: "MAPPING AND COMPARISON OF THE INTERACTION SITES ON THE FC REGION OF IGG RESPONSIBLE FOR TRIGGERING ANTIBODY DEPENDENT CELLULAR CYTOTOXICITY ADCC THROUGH DIFFERENT TYPES OF HUMAN FC-GAMMA RECEPTOR"</p> <p>MOLECULAR IMMUNOLOGY, vol. 29, no. 5, 1992, pages 633-639, XP000915240 ISSN: 0161-5890 abstract figure 3 page 634, right-hand column, paragraphs 3,4 page 637, left-hand column, line 15-18 page 638, left-hand column, paragraph 4 -right-hand column, paragraph 2</p>	<p>1-4, 8-10, 38-42, 44-49</p>
X	<p>WO 98 23289 A (GEN HOSPITAL CORP ;UNIV BRANDEIS (US)) 4 June 1998 (1998-06-04)</p> <p>claims 1-8 example 2</p>	<p>1-4, 8-15, 31-46</p>
X	<p>GHETIE VICTOR ET AL: "Increasing the serum persistence of an IgG fragment by random mutagenesis."</p> <p>NATURE BIOTECHNOLOGY, vol. 15, no. 7, 1997, pages 637-640, XP000876642 ISSN: 1087-0156 abstract page 637, left-hand column, paragraph 3 page 638, left-hand column, paragraph 1 page 639, right-hand column, paragraph 5 figure 2; table 1</p>	<p>1-4, 8-15, 31-46</p>
X	<p>MEDESAN CORNELIU ET AL: "Comparative studies of rat IgG to further delineate the Fc:FcRn interaction site."</p> <p>EUROPEAN JOURNAL OF IMMUNOLOGY, vol. 28, no. 7, July 1998 (1998-07), pages 2092-2100, XP000915239 ISSN: 0014-2980 abstract page 2095, right-hand column, paragraph 2 -page 2096, left-hand column, paragraph 1 page 2096, right-hand column, paragraph 2 -page 2097, column 2 page 2098, right-hand column, paragraph 3 page 2098, right-hand column, paragraph 2 page 3</p>	<p>1-4, 8-15, 31-46</p>

INTERNATIONAL SEARCH REPORT

Int tional Application No

PCT/US 00/00973

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>DATABASE BIOSIS 'Online! BIOSCIENCES INFORMATION SERVICE, PHILADELPHIA, PA, US; 16 December 1997 (1997-12-16) HENRY ALISTAIR J ET AL: "Participation of the N-terminal region of Cepsilon3 in the binding of human IgE to its high-affinity receptor FepsilonRI." Database accession no. PREV199800070240 XP002142066 abstract & BIOCHEMISTRY, vol. 36, no. 50, 16 December 1997 (1997-12-16), pages 15568-15578, ISSN: 0006-2960</p>	1,2
P,X	<p>WO 99 51642 A (GENENTECH INC) 14 October 1999 (1999-10-14) claims; examples 1-3</p>	1-49

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/00973

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5624821 A	29-04-1997	AT 94171 T	15-09-1993
		AU 600575 B	16-08-1990
		AU 1480388 A	10-10-1988
		DE 3883899 D	14-10-1993
		DE 3883899 T	31-03-1994
		EP 0307434 A	22-03-1989
		EP 0351410 A	24-01-1990
		WO 8807089 A	22-09-1988
		WO 8807054 A	22-09-1988
		GB 2209757 A, B	24-05-1989
		JP 1502875 T	05-10-1989
		US 5648260 A	15-07-1997
WO 9823289 A	04-06-1998	NONE	
WO 9951642 A	14-10-1999	AU 3369999 A	25-10-1999



European Patent
Office

EUROPEAN SEARCH REPORT

0083753
Application number

EP 82 11 1569

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 7)
Y	US-A-3 486 274 (C. DAVID) * Claims 1,2; figure 2c; column 3, lines 31-42 *	1	G 11 B 5/84 B 24 B 7/00 B 24 B 39/00
D,Y	--- IBM TECHNICAL DISCLOSURE BULLETIN, vol. 19, no. 10, March 1977, pages 3829-3830, N. Slindee; "Burnishing method and apparatus for flexible magnetic disks" * Page 3829, last paragraph - page 3830, second paragraph; figures 2,3 *	1	
D,A	--- IBM TECHNICAL DISCLOSURE BULLETIN, vol. 20, no. 3, August 1977, pages 1146-1147, D. Harker et al.; "Burnishing tool for flexible disks with chromium dioxide coatings" -----		TECHNICAL FIELDS SEARCHED (Int. Cl. 7) G 11 B B 24 B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 22-08-1985	Examiner VITZTHUM N.A.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

(10)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 083 753
B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: 12.04.89

(5) Int. Cl.⁴: **G 11 B 5/84, B 24 B 7/00**

(21) Application number: 82111569.8

(22) Date of filing: 14.12.82

(54) **Apparatus and method for burnishing magnetic disks.**

(30) Priority: 11.01.82 US 338689

(46) Date of publication of application:
20.07.83 Bulletin 83/29

(48) Publication of the grant of the patent:
12.04.89 Bulletin 89/15

(49) Designated Contracting States:
DE FR GB

(50) References cited:
US-A-3 486 274

IBM TECHNICAL DISCLOSURE BULLETIN, vol.
19, no. 10, March 1977, pages 3829-3830, N.
Slindee; "Burnishing method and apparatus for
flexible magnetic disks"

IBM TECHNICAL DISCLOSURE BULLETIN, vol.
20, no. 3, August 1977, pages 1146-1147, D.
Harker et al.; "Burnishing tool for flexible disks
with chromium dioxide coatings"

(70) Proprietor: International Business Machines
Corporation
Old Orchard Road
Armonk, N.Y. 10504 (US)

(71) Inventor: Bornhorst, Randy Joseph
3549 3rd Place N.W.
Rochester, MN 55901 (US)
Inventor: Bowen, Arlen John
3114 Knoll Lane
Rochester, MN 55901 (US)

(74) Representative: Vekemans, André
Compagnie IBM France Département de
Propriété Intellectuelle
F-06610 La Gaude (FR)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

EP 0 083 753 B1

Description

Various burnishing techniques have been used to finish the surface of flexible magnetic disks. In most cases these techniques have been adequate although available diskettes have a wide range of surface finishes. There is, however, a requirement for ever increasing bit density which cannot be satisfied with existing coatings. It has been found that simply improving existing coatings with more burnishing to provide a smoother finish is not adequate and an improved coating is necessary. Unfortunately, the existing burnishing techniques are not adequate to handle the improved coatings which have much improved smoothness. Smearing of asperities, embedding debris and removal of particles, causing voids, are common faults of existing techniques when applied to improved, smoother, coatings. The improved surface needs only to have the occasional large asperity removed to eliminate read-back defects. A further problem exists in the time required to burnish a disk. While some techniques provide adequate surface finish on existing media from a 20 to 40 second burnish, a more desirable figure is 2—4 seconds. In other words, to be a satisfactory technique, the burnishing of improved media should be able to be completed in 2—4 seconds. In addition to all this, the new technique should not require exotic technology or equipment but should resemble the existing burnishing process as much as possible to make it easy to implement in existing manufacturing sites with minimum retraining of machine operators.

The surface quality of a flexible magnetic disk as measured by the error free reproduction of recorded data can be substantially improved by mechanically treating the disk surface. The desirability of surface treatment and its advantages were recognized when it was discovered that untreated disk surfaces had reduced errors after they had been used for a period of time. There was rapid improvement for an initial period of use. After this, the disk remained essentially unchanged until the effect of mechanical wear became evident.

Following this discovery, efforts were made to speed up the break-in period since it was not practical to run the disks in normal fashion for the time required to improve their performance.

The various disk manufacturers use a variety of techniques, not all of which are publicly known. Examples of surface treatment are shown in U. S. patent 3,943,666 and 4,179,852 and IBM Technical Disclosure Bulletin Vol. 14, No. 5, October 1971 pages 1144—1146; Vol. 19, No. 10, March 1977 pages 3829—3830 and Vol. 20, No. 3, August 1977 pages 1146—1147.

These techniques are variously referred to as burnishing, polishing or honing but the objective, removal of asperities to improve the smoothness of the disk, is the same regardless of the name applied to the technique.

U. S. patent 3,943,666 describes a process

which uses an abrasive cylinder to burnish a flexible disk supported against a resilient backing plate. The surface deviation finish claimed for this process is $1.8 \cdot 10^{-10}$ m in a 12—22 second treatment. While surface finish dimensions are a factor, the real test is how the disk performs in actual practice. Even a very smooth finish may not perform well if the finish is obtained by a process which creates voids in the recording media.

U. S. patent 4,179,852 uses an abrasive loaded pad to polish a flexible disk. While the patent does not describe the quality of the surface finish obtained, it does specify a burnishing period of approximately 20 seconds.

U. S. patent 3,486,274 describes an apparatus for grinding the surface of a rigid disk. The metallic grinding pads are fastened to a rotating head in a fashion which permits them to conform to the undulations in the rigid disk. The grinding pads have slots of varying widths according to their distance from the center of the rotating head. Nothing is said concerning the ability to finish flexible disks.

IBM Technical Disclosure Bulletin Vol. 14, No. 5, pages 1444—5 shows a flexible disk surface treatment which uses a sharp flat hard blade which bears against a flexible disk in a region backed by a resilient pad. The treatment is specified to take 20 seconds.

IBM Technical Disclosure Bulletin, Vol. 19, No. 10, pages 3829—30 illustrates a burnishing process which typifies the prior art. A cup type burnishing tool is positioned within a hole in a flat Bernoulli plate which supports a rotating flexible disk. The edge of the cup forms a circular knife which engages the disk and smoothes out any high spots or bumps. The flow of air outwardly across the knife edge burnishing cup appears to create an area of reduced pressure within the cup to draw the flexible disk into engagement with the cup.

IBM Technical Disclosure Bulletin, Vol. 20, No. 3, August 1977, pages 1146—7 sets forth an improved version of the process described in Vol. 19. The improvement consists of a vacuum applied to the interior of the burnishing tool and a change to a rounded edge on the tool instead of the sharp edge previously described. This improvement is directed specifically to media which uses chromium dioxide coatings.

From the wide range of processes described above it can be seen that the treatment is more of an art than a science.

Where one process uses a sharp edged tool another uses a round edge. Some processes use abrasives either bonded to a tool or in a slurry and others use only a tool. Suffice to say that what works for one media is often not satisfactory for another or at least does not produce an optimum result.

The principal object of the invention is to provide an improved method and apparatus for burnishing flexible magnetic disks having an improved surface coating which cannot be satis-

factorily burnished with existing equipment and techniques. Flexible disks having a chromium dioxide coating are particularly suited to this technique. The apparatus includes a burnishing tool having multiple blades positioned in individual openings or holes. The holes are connected to a plenum. The tool is rotated over the flexible disk which is also rotated. A vacuum is applied to the plenum causing the flexible disk to fly at a fixed distance from the surface of the burnishing tool. The vacuum also serves to remove the material that is dislodged from the surface of the disk by the burnishing process. The burnishing blades are spaced from the wall of the hole to prevent material removed from the disk from becoming lodged in the corner where it could cause scratches and interfere with the burnishing process. The orientation of the burnishing blades is selected to ensure that each area of the flexible disk is treated by blades which are at different angles with respect to the surface.

Fig. 1 is a schematic drawing of the basic apparatus used to practice the invention.

Fig. 2 is a partial side view of the burnishing tool and the platter used to rotate the flexible disk.

Fig. 3 is an enlarged portion of the burnishing tool and platter of Fig. 2 showing the tool in the operative position.

Fig. 4 is a partial sectional view taken through a burnishing blade and a flexible disk.

Fig. 5 is a partial perspective view showing a burnishing blade and the notches at the ends of the blade.

Fig. 6 is a bottom view of the burnishing tool.

Fig. 7 shows the orientation of the burnishing blades.

Fig. 8 is a perspective view of the burnishing tool and manifold.

The flexible disk surface finishing system shown in Fig. 1 has a flexible disk support platter 1 suitably mounted for rotation about a first axis 2. A hub 3, located at the center of platter 1, positions and clamps flexible disk 4 on platter 1 so that disk 4 rotates at the same speed as platter 1. Hub 3 can be an expandable collet, or a flange type clamp operated by air, electrical or mechanical means. Precise centering is not required but no slippage between the disk 4 and platter 1 should occur during the finishing process.

Platter 1 can be driven by any suitable means such as drive pulley 10, mounted on drive shaft 11, and belt 12. Shaft 11 is driven by means which provides precise control of the rotational speed. In the preferred embodiment the platter 1 is rotated in the direction of arrow 13 at 1658 revolutions per minute and controlled within ± 2 revolutions per minute. A synchronous motor or stepping motor energized by a source of energy at the appropriate frequency is a preferred drive means for shaft 11.

A burnishing tool 19 including a manifold 20 is positioned above the platter 1. Manifold 20 is mounted on hollow shaft 21 which rotates within the seal bearing assembly 22. Burnishing tool 19 and manifold 20 are rotated about axis 23 by

means of belt 24 and drive pulley 25 on shaft 26. The burnishing tool is rotated in the direction of arrow 27 at a speed of 1650 revolutions per minute and controlled within ± 2 revolutions per minute.

The manifold 20 is mounted so that it may be lowered to within 0,254 mm of flexible disk 4. When in this position, valve 30 is rotated from a position which vents the manifold to the atmosphere to the position shown in Fig. 1. This applies a vacuum, generated by vacuum pump 31, to the manifold 20. The vacuum system includes a relief valve 32 and reservoir 33.

The relationship between burnishing tool 19 and disk 4 prior to the finishing is shown in Fig. 2. Burnishing tool 19 is spaced well away from platter 1 to allow disk 4 to be placed in position and clamped to platter 1 by hub 3. In order to remove such loose particles as may exist on the disk surface, a brush 39, rotating in the direction of arrow 38, may be lowered into engagement with flexible disk 4.

After this treatment with brush 39 the burnishing tool 19 is moved to the position shown in Fig. 3 which places the lower, planar, surface 40 of manifold 20 approximately 0,254 mm above disk 4. When valve 30 is moved to the position shown in Fig. 1, the resulting air flow between disk 4 and planar surface 40 into the openings 41 causes flexible disk 4 to fly against planar surface 40 as shown in Fig. 4. In the area of the planar surface 40 the disk 4 will fly at a height greater than the average coating roughness, but less than the height of the troublesome asperities. However, in the area of holes 41, the flexible disk 4 bows slightly upward and comes into engagement with burnishing blade 42. The engagement is primarily a function of the mechanical properties of the flexible disk 4, the air flow between disk 4 and planar surface 40, the amount of vacuum, and the size of hole 41. Other factors are less significant. In the preferred embodiment the gauge vacuum within manifold 20 during operation is 3×10^{-4} Pa ($\pm 0,3$).

The burnishing blade 42 engages flexible disk 4 at right angles so that the blade tends to wear sharp. This is significant to blade life and the performance of the system. A sharp blade tends to reduce smearing of asperities. Smearing is undesirable because, among other disadvantages, it reduces the sites available for lubricant retention. Smearing also tends to aggravate the transfer of asperities from the media to the recording transducer where they adhere and cause an increase in the head to disk spacing. Thus, a smoother finish, if produced by smearing, may not result in improved performance.

The physical arrangement of burnishing blades 42 and holes 41 is shown in greater detail in Figs. 5-8. The shape of blade 42 is shown in Fig. 5. The ends 43 and 44 are spaced away from the wall of hole 41. The distance between the ends 43 and 44 and the wall is selected to prevent debris removed from the disk 4 from becoming wedged between the blade 42 and the wall. This distance

depends largely on the size of the debris generated during the burnishing process and will be determined experimentally in most cases. A selected dimension can be used in a trial run. If the corners become filled, a larger dimension can be tried. Although the drawing is not made to scale it does illustrate an approximation for the gap. A distance one to three times the blade thickness is a good starting point. Further, if too large a gap is used the ends 43 and 44 may score the surface of disk 4 although this is not a problem with acceptable gaps.

Fig. 6 shows the arrangement of the holes 41 in the planar surface 40. In the preferred embodiment eight holes 41 and blades 42 are used. The area of holes 41 is approximately 33% of the area of planar surface 40. These are spaced at regular intervals along a circular path equidistant from the axis of rotation. It is desirable to have the diameter of the circular area encompassed by the blades to be slightly greater than the radial region to be burnished on the disk. This allows a disk to be burnished without the need for radial translation of burnishing tool 19.

Each of the blades 42—1 through 42—8 is positioned at 45° with respect to the direction of rotation. It has been found that improved burnishing results if the blades are so arranged. Although the reason for this is not entirely clear it may be due to reduced smearing of asperities. An additional improvement is provided by positioning alternate blades at 90°, still at 45° with respect to the direction of rotation, but canted in the other direction. This arrangement is shown in Fig. 7 where the leading edges of blades 1, 3, 5 and 7 lie 45° to the left of the direction of rotation shown by arrow 50. The leading edges of blades 2, 4, 6 and 8 lie 45° to the right of arrow 50. Thus, when a surface imperfection is encountered, blade 1 tends to shear it to the right, blade 2 tends to shear it to the left, etc. This arrangement has been effective in reducing the smearing of such imperfections when the tool or tools move in the same path at the same angle with respect to the disk.

The front perspective view of Fig. 8 shows the planar surface 40 of burnishing tool 19 and the blades 42 arranged in the holes 41. Each of the holes 41—1 through 41—8 communicates with the hollow interior of manifold 20. This arrangement is shown in Fig. 3. The blades 42 may be individually fabricated, mounted in holes 41 and then ground flush with planar surface 40. It has been found preferable to fashion the blades and the manifold from a single piece of tool steel. The holes 41 and blades 42 can be fabricated by means of conventional electro discharge machining or chemical etching. The planar surface 40 is finished in the usual fashion by grinding, lapping, and polishing to a mirror-like finish.

Claims

1. Apparatus for finishing the surface of a flexible magnetic disk (4) comprising:

first drive means (10) for rotating said flexible

disk about a first axis (2) perpendicular to the plane of said disk,

a manifold (20) rotatable about a second axis (23) parallel to and spaced from said first axis, said manifold having a planar surface (40) perpendicular to said second axis,

means (30, 31, 32) for applying a vacuum to said manifold to draw a flexible disk toward said manifold planar surface and,

second drive means (25) for rotating said manifold about said second axis, characterized in that said manifold (20) has a plurality of openings (41) in said planar surface

a burnishing blade (42) mounted in at least one of said openings with a blade edge positioned substantially coplanar with said manifold planar surface, the ends of said blade edge being spaced from the wall of said openings.

2. Apparatus according to Claim 1 characterized in that it further includes:

means for controlling the speed of said first and second drive means (10, 25) to cause the rotational speed of said manifold (20) to differ from the rotational speed of said disk (4).

3. Apparatus according to Claim 2 characterized in that:

the rotational speed of said manifold (20) is 1650 RPM \pm 2 RPM and the rotational speed of said disk (4) is 1658 RPM \pm 2 RPM.

4. Apparatus according to any one of Claims 1-3 characterized in that:

the diameter of said planar surface (40) is greater than the radial length of the area to be burnished.

5. Apparatus according to any one of Claims 1-4 characterized in that:

the distance between said first and second axes (2, 23) remains constant during burnishing.

6. Apparatus according to any one of Claims 1-5 characterized in that:

said openings (41) are arranged equidistant from said second axes (23).

7. Apparatus according to any one of Claims 1-6 characterized in that:

the area of said openings (41) is approximately 33% of the area of said planar surface (40).

8. Apparatus according to any one of Claims 1-7 characterized in that:

the gauge vacuum within said manifold (20) during operation is 3×10^{-4} Pa (± 0.3).

9. A process for finishing the surface of a flexible magnetic disk comprising the steps of:

1. Rotating the disk at a first speed,

2. Rotating a manifold, having a planar surface burnishing blades positioned in holes in a planar surface, at a second, different speed.

3. Applying a vacuum to said manifold to cause said disk to fly against said planar surface and engage said burnishing blades.

4. Discharging said vacuum to disengage said disk from said manifold surface when the treatment is complete, characterized in that

said manifold has burnishing blades positioned in holes in a planar surface, at a second different speed.

10. A process according to Claim 9 characterized in that:

step 3 lasts at least 2 seconds and not more than 5 seconds.

11. A flexible magnetic disk characterized in that it is treated according to the process of claim 9 or 10.

Patentansprüche

1. Vorrichtung zur Endbearbeitung der Oberfläche einer flexiblen magnetischen Platte (4), enthaltend:

erste Antriebsmittel (10) zur Drehung der genannten flexiblen Platte um eine erste Achse (2), die senkrecht zur Ebene der genannten Platte angeordnet ist,

einen um eine zweite Achse (23) drehbaren, zu der ersten Achse parallel und in einem gewissen Abstand von derselben angeordneten Verteiler (20),

wobei der genannte Verteiler eine zu der genannten zweiten Achse senkrechte ebene Oberfläche (40) hat,

Mittel (30, 31, 32) zur Herstellung eines Vakuums an dem genannten Verteiler, um eine flexible Platte zu der genannten ebenen Verteileroberfläche hinzuziehen, und

zweite Antriebsmittel (25) für die Drehung des genannten Verteilers um die genannte zweite Achse, dadurch gekennzeichnet,

dass der genannte Verteiler (20) eine Mehrzahl von Öffnungen (41) in der genannten ebenen Oberfläche hat,

ein zumindest in eine der genannten anmontiertes Polierblatt (42) mit einer im wesentlichen koplanar mit der genannten ebenen Verteileroberfläche positionierten Blattkante, wobei die Enden des genannten Blattes einen Abstand zur Wand der genannten Öffnungen aufweisen.

2. Vorrichtung nach Anspruch 1, dadurch gekennzeichnet, dass sie ferner enthält:

Mittel zur Steuerung der Geschwindigkeit der genannten ersten und zweiten Antriebsmittel (10, 25), um sicherzustellen, dass die Drehgeschwindigkeit des genannten Verteilers (20) von der Drehgeschwindigkeit der genannten Platte (4) verschieden ist.

3. Vorrichtung nach Anspruch 2, dadurch gekennzeichnet, dass:

Die Drehgeschwindigkeit des genannten Verteilers (20) $1650 \text{ U/min} \pm 2 \text{ U/min}$ und die Drehgeschwindigkeit der genannten Platte (4) $1658 \text{ U/min} \pm 2 \text{ U/min}$ beträgt.

4. Vorrichtung nach irgendeinem der Ansprüche 1 bis 3, dadurch gekennzeichnet, dass:

Der Durchmesser der genannten ebenen Oberfläche (40) grösser als die radiale Länge der zu polierenden Fläche ist.

5. Vorrichtung nach irgendeinem der Ansprüche 1 bis 4, dadurch gekennzeichnet, dass:

Der Abstand zwischen den genannten ersten und zweiten Achsen (2, 23) während des Poliervorgangs konstant bleibt.

6. Vorrichtung nach irgendeinem der Ansprüche

che 1 bis 5, dadurch gekennzeichnet, dass:

Die genannten Öffnungen (41) abstandsgleich von den genannten zweiten Achsen (23) angeordnet sind.

7. Vorrichtung nach irgendeinem der Ansprüche 1 bis 6, dadurch gekennzeichnet, dass:

Die Fläche der genannten Öffnungen (41) ca. 33% der Fläche der genannten ebenen Oberfläche (40) ausmacht.

8. Vorrichtung nach irgendeinem der Ansprüche 1 bis 7, dadurch gekennzeichnet, dass:

Das gemessene Vakuum innerhalb des genannten Verteilers (20) während des Betriebs $3 \times 10^4 \text{ Pa} (\pm 0,3)$ beträgt.

9. Ein Verfahren zur Endbearbeitung der Oberfläche einer flexiblen Magnetplatte, enthaltend folgende Schritte:

1. Drehung der Platte mit einer ersten Geschwindigkeit,

2. Drehung eines Verteilers mit einer ebenen Oberfläche,

3. Herstellung eines Vakuums an dem genannten Verteiler, um die genannte Platte zu veranlassen, gegen die genannte ebene Oberfläche zu fliegen und die genannten Polierblätter in Eingriff zu bringen.

4. Ablassen des genannten Vakuums, um die genannte Platte mit der genannten ebenen Verteileroberfläche ausser Eingriff zu bringen, wenn die Bearbeitung beendet ist, dadurch gekennzeichnet, dass:

Der genannte Verteiler hat Polierblätter, die in Löchern in einer ebenen Oberfläche positioniert sind, mit einer zweiten, unterschiedlichen Geschwindigkeit.

10. Ein Verfahren nach Anspruch 9, dadurch gekennzeichnet, dass:

Der Schritt 3 zumindest 2 Sekunden und nicht mehr als 5 Sekunden dauert.

11. Eine flexible Magnetplatte, dadurch gekennzeichnet, dass sie entsprechend dem Verfahren der Ansprüche oder 10 bearbeitet wird.

Revendications

1. Appareil de finition de la surface d'un disque magnétique flexible (4) comprenant:

un premier moyen d'entraînement (10) pour entraîner en rotation ledit disque flexible autour d'un premier axe (2) perpendiculaire au plan dudit disque,

un collecteur (20) rotatif autour d'un second axe (23) parallèle audit premier axe et à distance de celui-ci,

ledit collecteur présentant une surface plane (40) perpendiculaire audit second axe,

des moyens (30, 31, 32) pour appliquer une aspiration audit collecteur afin de tirer un disque flexible vers ladite surface plane du collecteur, et

un second moyen d'entraînement (25) pour entraîner en rotation ledit collecteur autour dudit second axe,

caractérisé en ce que ledit collecteur (20) comprend:

une pluralité d'ouvertures (41) ménagées dans

ladite surface plane,

une lame de polissage (42) montée dans au moins l'un desdites ouvertures avec un tranchant de la lame positionné pratiquement dans le même plan que ladite surface plane de collecteur, les extrémités dudit tranchant de lame étant à distance de la paroi desdites ouvertures.

2. Appareil selon la revendication 1 caractérisé en ce qu'il comprend en outre:

des moyens pour commander la vitesse desdits premier et second moyens d'entraînement (10, 25) afin de rendre la vitesse de rotation dudit collecteur (20) différente de la vitesse de rotation dudit disque (4).

3. Appareil selon la revendication 2 caractérisé en ce que:

la vitesse de rotation dudit collecteur (20) est de 1650 tours par minute plus ou moins 2 tours par minute et en ce que la vitesse de rotation dudit disque (4) est de 1658 tours par minute plus ou moins 2 tours par minute.

4. Appareil selon l'une quelconque des revendications 1—3 caractérisé en ce que:

le diamètre de ladite surface plane (40) est supérieur à la longueur radiale de la zone à polir.

5. Appareil selon l'une quelconque des revendications 1—4 caractérisé en ce que:

la distance entre lesdits premier et second axes (2, 23) reste constante pendant le polissage.

6. Appareil selon l'une quelconque des revendications 1—5 caractérisé en ce que:

lesdites ouvertures (41) sont agencées de façon à être équidistantes desdits seconds axes (23).

7. Appareil selon l'une quelconque des revendications 1—6 caractérisé en ce que:

la zone desdites ouvertures (41) est approximativement égale à 33% de la zone de ladite surface plane (40).

8. Appareil selon l'une quelconque des revendications 1—7 caractérisé en ce que:

l'indication manométrique de vide dans ledit collecteur (20) pendant le fonctionnement est de 3×10^{-4} Pa (plus ou moins 0,3).

9. Un procédé de finition de la surface d'un disque magnétique flexible comprenant les étapes suivantes:

1. L'entraînement en rotation du disque à une première vitesse.

2. L'entraînement en rotation d'un collecteur présentant une surface plane à une seconde vitesse différente.

3. L'application d'un vide audit collecteur afin de provoquer le vol dudit disque contre ladite surface plane et son contact avec lesdites lames de polissage;

4. La suppression dudit vide pour séparer ledit disque de ladite surface du collecteur lorsque le traitement est achevé, caractérisée en ce que ledit collecteur présente des lames de polissage disposées dans des trous ménagés dans une surface plane.

10. Un procédé selon la revendication 9 caractérisé en ce que:

l'étape 3 dure au moins 2 secondes et pas plus de 5 secondes.

11. Un disque magnétique flexible caractérisé en ce qu'il est traité selon le procédé de la revendication 9 ou de la revendication 10.

FIG. 1

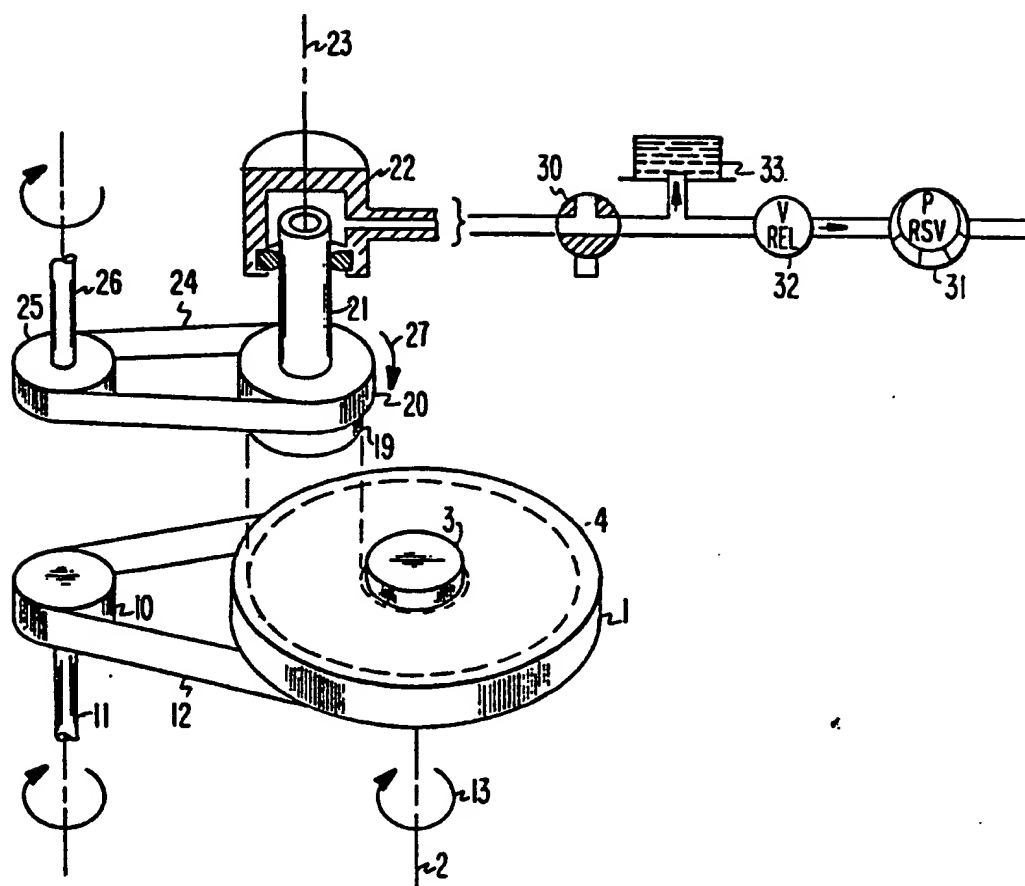


FIG. 2

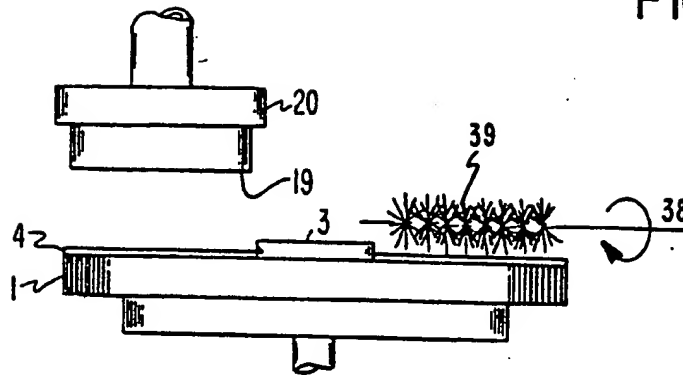


FIG. 3

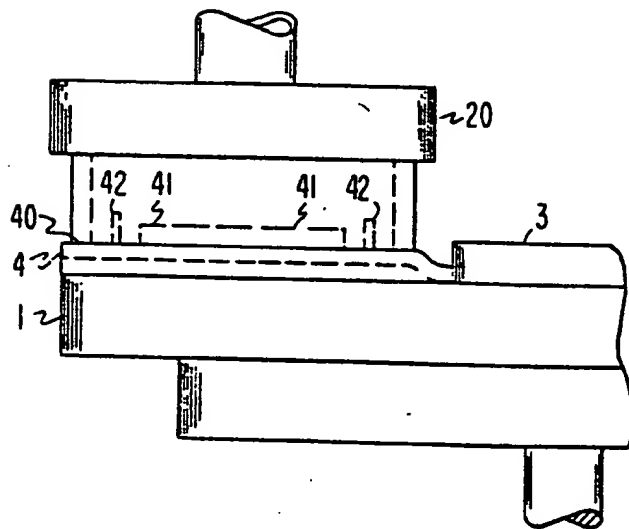


FIG. 4

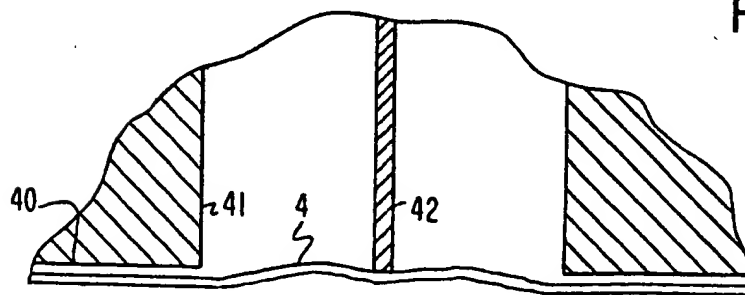


FIG. 5

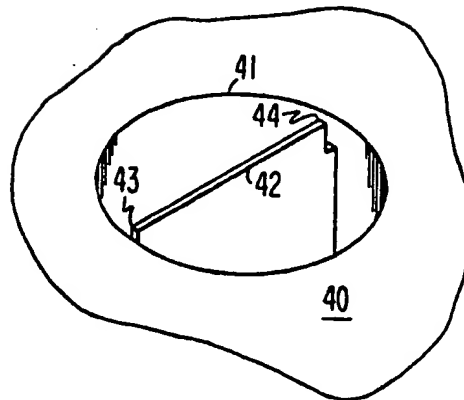


FIG. 6

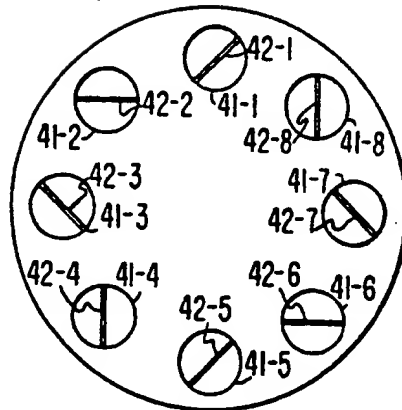


FIG. 7




FIG. 8

